


MIX SERIES



EM POWER
LEADS
THE WAY

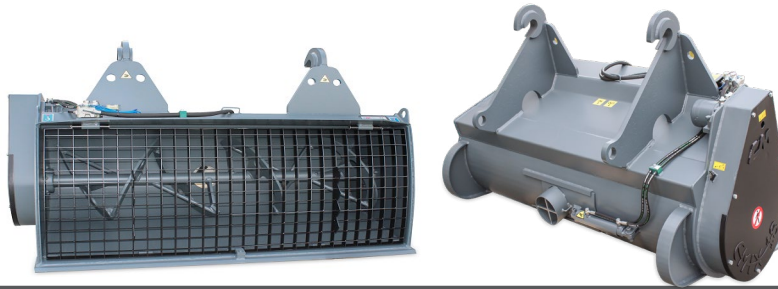

It can mix concrete in any condition and in a short time. Produced from 160 up to 1300 lt.

OPTIONAL

- Interchangeable bolted bottom
- Interchangeable bolted cochlea
- Hydraulic grid opening
- Connector 8-14 poles 12 V
- Pre-arrangement for excavator / backhoe / wheel loader / telescopic handler / tractor
- Interchangeable bolted upper bracket

STRENGTHS

- 12/24 Volt electric valve for hydraulic mouth opening
- Cutting edge, shoulders, bottom and propeller in anti-wear material
- Engine resistant up to 350 bar
- Double internal support of motor shaft
- Chain tensioning rod
- Chain transmission
- Supporting foot during the mixing operation
- Hydraulic mouth for discharge
- Standard hose for concrete discharge
- Easy and uncomplicated maintenance



Canalization / Subsoil



Demolitions



Construction industry



Tunnel / Closed spaces



Agricultural / Forest maintenance



Recycling



Quarries / Mines



Streets

DATA SHEET		MIX 160	MIX 220	MIX 250	MIX 300	MIX 350	MIX 500	MIX 650	MIX 800	MIX 1000	MIX 1300
Useful width	mm	800	1000	1200	1200	1400	1600	1800	1800	2000	2200
Rated capacity	l	160	220	250	300	350	500	650	820	1050	1300
Max Capacity	l	180	250	275	330	400	550	780	1050	1350	1600
Void Weight	Kg	200	235	270	300	450	550	740	860	950	1130
Weight at full load	Kg	580	763	870	1020	1290	1750	2300	2828	3470	4250
Transmission		Chain									
Mouth opening		Hydraulic									
Oil flow	l/min	20/30	20/30	20/30	40/60	40/60	40/60	70/100	70/100	100/130	150/200
Pressure	bar	150	150	150	170	170	170	170	170	200	200
Engine	n.	1	1	1	1	1	1	1	1	2	2
Dimensions	w x d x H	1000 x 800 x H 700	1200 x 800 x H 700	1400 x 800 x H 700	1400 x 800 x H 800	1600 x 800 x H 800	1800 x 1000 x H 900	1100 x 2100 x H 1000	1100 x 2100 x H 1100	1350 x 2400 x H 1200	1400 x 2500 x H 1300

Weights and dimensions could vary without notice. Weight does not include the coupler.